




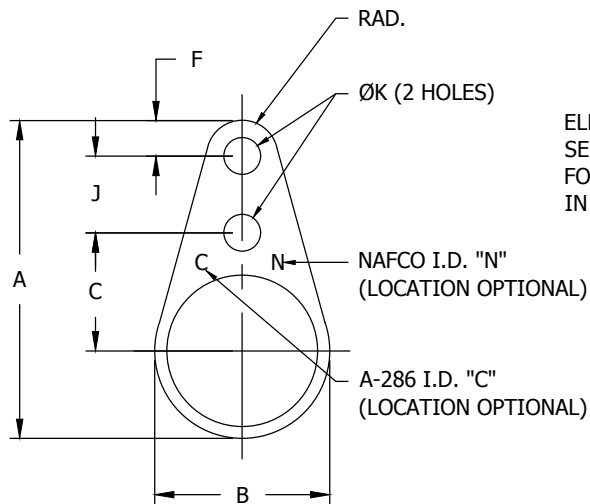

NUT -- ANCHOR, MINIATURE, ONE LUG, FIXED, CAPPED, 125,000 PSI



ELLIPTICALLY DEFORMED
SELF-LOCKING DEVICE
FOR INTERNAL THREAD
IN THIS AREA

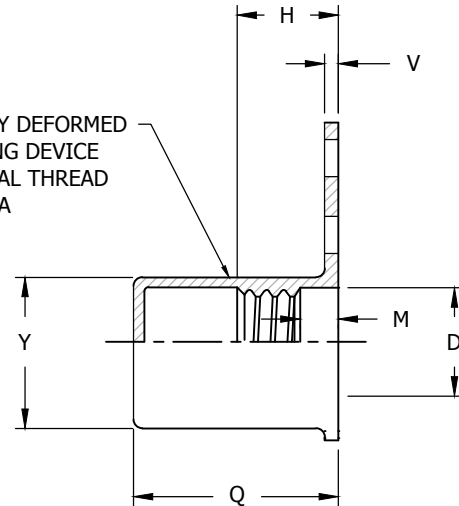

ALTERNATE CONFIGURATION

TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER		THREAD (AS8879)	A	B	ØC	D	F	H	J	ØK	M	Q	V	Y	APPROX. WT. LBS./100
CRES. 900°F	CRES. 900°F		MAX	MAX	±.005	MIN	MIN	MAX	±.002	+.005 -.000	MIN	+.020 -.010	REF.	REF.	
NA2137-40K	NA2137C-40K	.1120-40 UNJC-3B	.550	.194	.148	---	.071	.143	.219	.066	---	.293	.027	.198	.13
NA2137-40K1	NA2137C-40K1											.179			.10
NA2137-62K	NA2137C-62K	.1380-32 UNJC-3B	.598	.242	.171	---	.071	.171	.219	.066	---	.516	.031	.228	.23
NA2137-62K1	NA2137C-62K1											.375			.20
NA2137-82K	NA2137C-82K	.1640-32 UNJC-3B	.716	.297	.234	.168	.100	.250	.219	.098	.063	.516	.031	.252	.30
NA2137-82K1	NA2137C-82K1											.375			.25
NA2137-02K	NA2137C-02K	.1900-32 UNJF-3B	.745	.328	.250	.194	.100	.250	.219	.098	.063	.516	.031	.280	.36
NA2137-02K1	NA2137C-02K1											.375			.32
NA2137-048K	NA2137C-048K	.2500-28 UNJF-3B	.822	.414	.281	.254	.100	.281	.219	.098	.071	.547	.040	.347	.58
NA2137-048K1	NA2137C-048K1											.438			.52
NA2137-054K	NA2137C-054K	.3120-24 UNJF-3B	1.026	.505	.359	.317	.125	.328	.269	.130	.083	.609	.045	.411	.95
NA2137-054K1	NA2137C-054K1											.500			.84
NA2137-064K	NA2137C-064K	.3750-24 UNJF-3B	1.139	.614	.414	.379	.125	.344	.269	.130	.083	.719	.045	.472	1.32
NA2137-064K1	NA2137C-064K1											.500			1.20

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2137, NA2137C
FSC / CAGE CODE 32387