


CLINCHNUT SELF-LOCKING

VARIATIONS: "M" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168SM-02-1
"S" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL SILVER PLATE. EX. - NA2168CS-82-2
"DF" -- ADD AFTER LAST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168-82-2DF

APPLICATION: A PRESS-IN NUT FOR USE IN THIN ALUMINUM AND MAGNESIUM SHEETS, GRAPHITE COMPOSITE AND FIBER-REINFORCED PLASTIC SHEETS, PRINTED CIRCUIT BOARDS, ETC.

EXAMPLE CALLOUT:

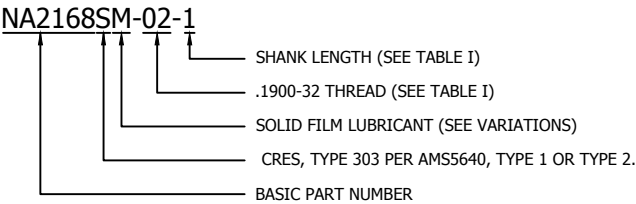

- NOTES:
- 1. UNDER NO CIRCUMSTANCES WILL SILVER PLATING AND SOLID FILM LUBRICANT BOTH BE APPLIED TO A286 CORROSION RESISTANT STEEL.
 - 2. "M" FINISH CODE IS EQUIVALENT TO AND SUPERSEDES "DF" FINISH CODE.
 - 3. FOR OTHER FINISHES AND MATERIALS CONTACT NAFCO USA, LLC.
 - 4. PUSH-OUT AND TORQUE-OUT VALUES SHALL BE AS SPECIFIED IN TABLE II WHEN PROPERLY INSTALLED IN LOW CARBON STEEL SHEET.

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2168
FEDERAL SUPPLY CODE: 32387