

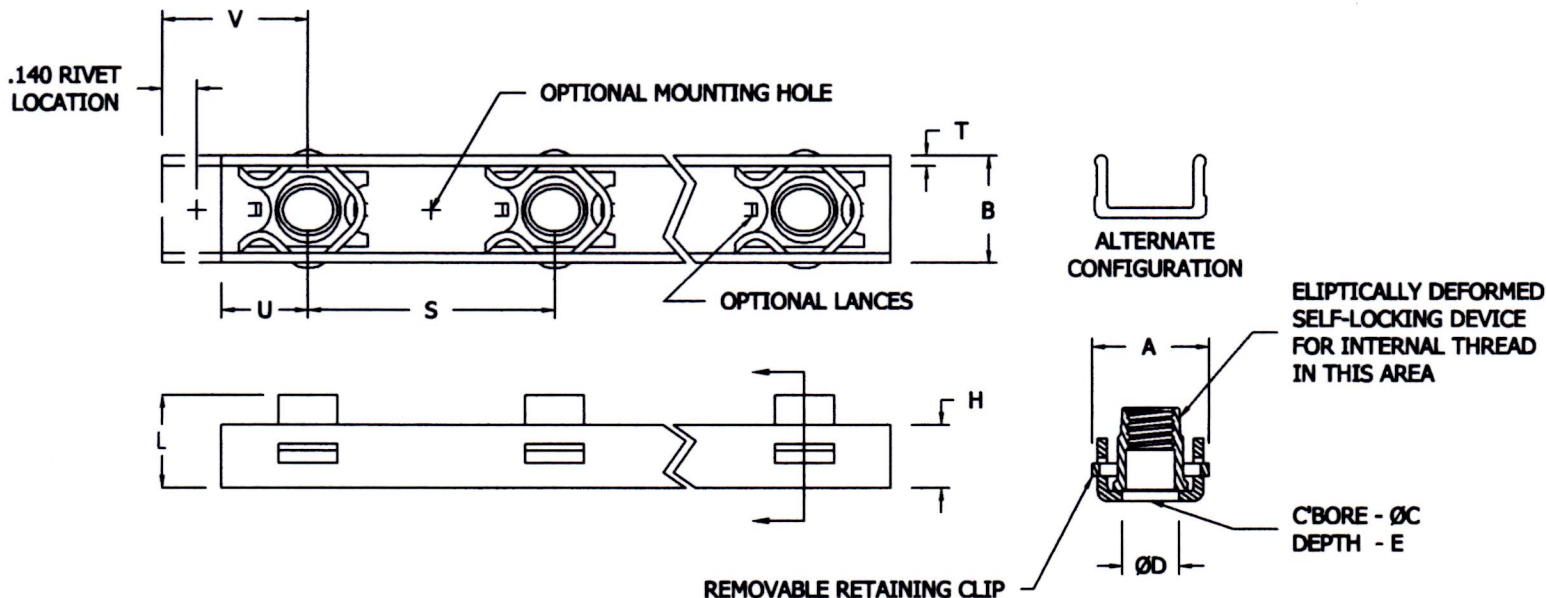


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	THREAD (AS8879)	A REF	B MAX	ØC MIN	ØD ±.005	E MIN /6/	H REF	L MAX	T ±.005	U +.030 -.000	V +.030 -.000	PUSH OUT LB. MIN.	TORQUE OUT IN-LBS. MIN.
NA2066-1-02 ()	.1900-32 UNF-3B	.474	.442	.194	.224	.070	.250	.250	.040	.350	.590	200	90
NA2066-2-02 ()						.125		.312					
NA2066-3-02 ()						.188		.375					
NA2066-4-02 ()						.250		.437					
NA2066-5-02 ()						.313		.500					
NA2066-6-02 ()						.375		.562					
NA2066-1-048 ()	.2500-28 UNF-3B	.574	.532	.254	.285	.070	.298	.305	.040	.400	.640	225	160
NA2066-2-048 ()						.125		.357					
NA2066-3-048 ()						.188		.420					
NA2066-4-048 ()						.250		.482					
NA2066-5-048 ()						.313		.545					
NA2066-6-048 ()						.375		.607					
NA2066-1-054 ()	.3125-24 UNF-3B	.710	.640	.317	.348	.070	.344	.370	.050	.450	.720	250	280
NA2066-2-054 ()						.125		.429					
NA2066-3-054 ()						.188		.492					
NA2066-4-054 ()						.250		.544					
NA2066-5-054 ()						.313		.617					
NA2066-6-054 ()						.375		.679					
NA2066-1-064 ()	.3750-24 UNF-3B	.830	.733	.379	.410	.070	.380	.454	.062	.520	.790	250	420
NA2066-2-064 ()						.125		.509					
NA2066-3-064 ()						.188		.572					
NA2066-4-064 ()						.250		.634					
NA2066-5-064 ()						.313		.697					
NA2066-6-064 ()						.375		.759					
NA2066-1-070 ()	.4375-20 UNF-3B	.960	.830	.442	.473	.070	.400	.592	.062	.570	.840	250	610
NA2066-2-070 ()						.125		.647					
NA2066-3-070 ()						.188		.710					
NA2066-4-070 ()						.250		.772					
NA2066-5-070 ()						.313		.835					
NA2066-6-070 ()						.375		.897					
NA2066-1-080 ()	.5000-20 UNF-3B	1.075	.955	.504	.535	.070	.500	.665	.078	.625	.895	250	790
NA2066-2-080 ()						.125		.725					
NA2066-3-080 ()						.188		.788					
NA2066-4-080 ()						.250		.850					
NA2066-5-080 ()						.313		.913					
NA2066-6-080 ()						.375		.975					