


CLINCHNUT SELF-LOCKING, MINIMAL DISPLACEMENT KNURL FORM

VARIATIONS: "M" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2336SM-02-1
 "S" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL SILVER PLATE. EX. - NA2336CS-82-2

APPLICATION: A PRESS-IN NUT FOR USE IN THIN ALUMINUM AND MAGNESIUM SHEETS, CASTINGS, GRAPHITE COMPOSITE AND FIBER-REINFORCED PLASTIC SHEETS, PRINTED CIRCUIT BOARDS, ETC. WHERE BOSS AND EDGE THICKNESS NEAR MOUNTING HOLE IS MINIMAL, AND MINIMUM DISPLACEMENT OF PARENT MATERIAL IS DESIRABLE.

EXAMPLE CALLOUT:

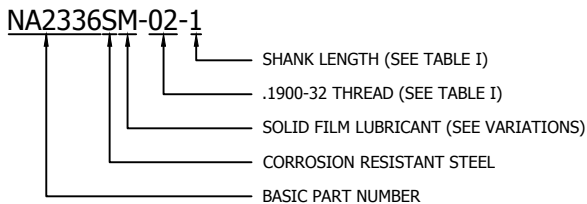

- NOTES:**
- 1.) SEE PAGE 2.203 FOR INSTALLATION PROCEDURE AND RECOMMENDED TOOLING.
 - 2.) UNDER NO CIRCUMSTANCES WILL SILVER PLATING AND SOLID FILM LUBRICANT BOTH BE APPLIED TO A286 CORROSION RESISTANT STEEL.
 - 3.) "M" FINISH CODE IS EQUIVALENT TO AND SUPERSEDES "DF" FINISH CODE.
 - 4.) FOR OTHER FINISHES AND MATERIALS CONTACT NAFCO USA, LLC.

CONFORMS TO:
M45938
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2336
FSC / CAGE CODE: 32387