



# MICROHEX, NUT, HEX, MINIATURE, SELF-LOCKING

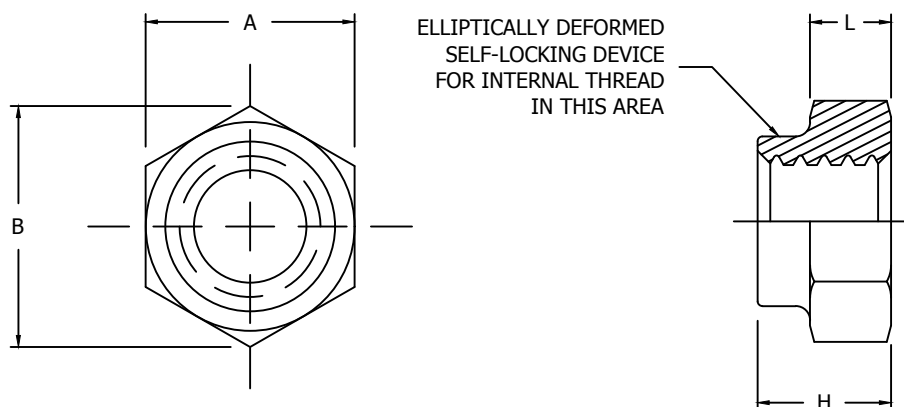


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER			THREAD (AS8879)	A ---	B REF	H ±.005	L REF	APPROX. WEIGHT LBS./100
STEEL 450°F	CRES. 650°F	CRES. 650°F						
NA2013-00	NA2013S-00	NA2013SS-00	.0600-80 UNJF-3B	.104 - .110	.116	.065	.040	.011
NA2013-24	NA2013S-24	NA2013SS-24	.0860-64 UNJF-3B	.150 - .158	.169	.095	.048	.028
NA2013-26	NA2013S-26	NA2013SS-26	.0860-56 UNJC-3B					
NA2013-36	NA2013S-36	NA2013SS-36	.0990-56 UNJF-3B	.181 - .190	.205	.110	.063	.045
NA2013-38	NA2013S-38	NA2013SS-38	.0990-48 UNJC-3B					
NA2013-48	NA2013S-48	NA2013SS-48	.1120-48 UNJF-3B	.181 - .190	.205	.110	.063	.045
NA2013-40	NA2013S-40	NA2013SS-40	.1120-40 UNJC-3B					
NA2013-54	NA2013S-54	NA2013SS-54	.1250-44 UNJF-3B	.181 - .190	.205	.120	.076	.045
NA2013-50	NA2013S-50	NA2013SS-50	.1250-40 UNJC-3B					
NA2013-60	NA2013S-60	NA2013SS-60	.1380-40 UNJF-3B	.212 - .220	.233	.140	.085	.088
NA2013-62	NA2013S-62	NA2013SS-62	.1380-32 UNJC-3B					

## MATERIAL:

NO CODE -- CARBON OR ALLOY STEEL.  
 "S" CODE -- 303 CRES PER AMS5640 OR AMS5641.  
 "SS" CODE -- 303 CRES PER AMS5640 OR AMS5641.

## FINISH:

NO CODE -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE II, CLASS 3.  
 "S" CODE -- PASSIVATED PER AMS2700.  
 "SS" CODE -- SILVER PLATED PER AMS2410.  
 "DF" CODE -- PASSIVATED PER AMS2700 PLUS SOLID FILM LUBRICANT PER AS5272.

## SERVICE TEMP.:

NO CODE -- TO 450°F.  
 "S" CODE -- TO 650°F.  
 "SS" CODE -- TO 650°F.

CONFORMS TO:  
 NASM25027  
 AS8879

# NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER

# NA2013

FEDERAL SUPPLY CODE: 32387