

# JIFFYNUT, LOCKING AND NON-LOCKING

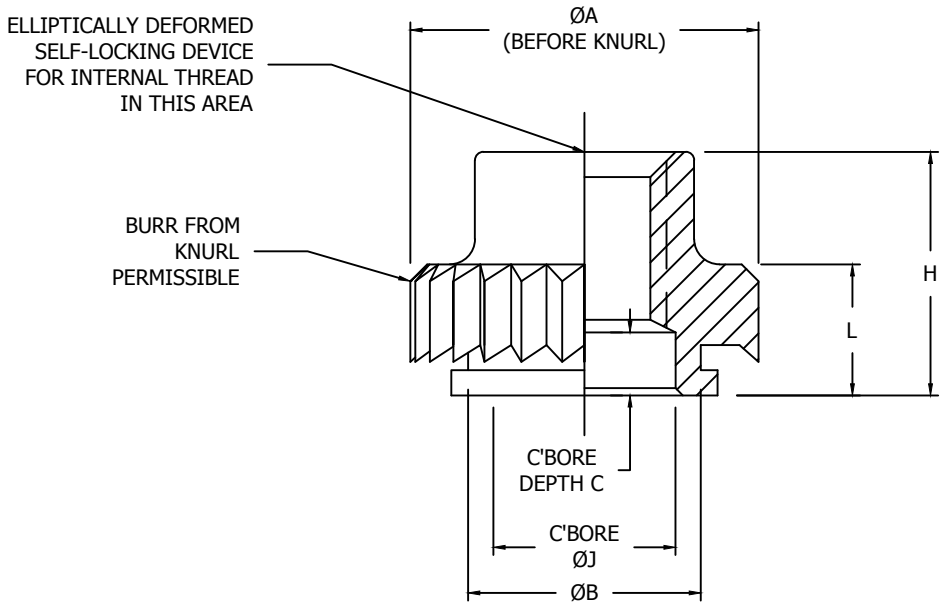


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	THREAD (AS8879)	A REF	B +.002 - .003	C MIN	H ±.010	J MIN	L REF	APPROX. WEIGHT LBS./100
NA2092-26	.0860-56 UNJC-3B	.19	.134	.025	.131	.086	.06	.03
NA2092-40	.1120-40 UNJC-3B	.22	.170	.025	.155	.112	.06	.04
NA2092-62	.1380-32 UNJC-3B	.25	.189	.025	.176	.138	.06	.06
NA2092-82	.1640-32 UNJC-3B	.28	.216	.030	.195	.164	.07	.07
NA2092-04	.1900-24 UNJC-3B	.31	.248	.030	.195	.190	.07	.12
NA2092-02	.1900-32 UNJF-3B	.31	.248	.030	.195	.190	.07	.12
NA2092-040	.2500-20 UNJC-3B	.41	.342	.035	.250	.250	.08	.23
NA2092-048	.2500-28 UNJF-3B	.41	.342	.035	.250	.250	.08	.23
NA2092-058	.3125-18 UNJC-3B	.47	.402	.050	.292	.312	.09	.40
NA2092-054	.3125-24 UNJF-3B	.47	.402	.050	.292	.312	.09	.40

**MATERIAL:** NO CODE -- ALLOY STEEL OR 416 CORROSION RESISTANT STEEL - HEAT TREATED.  
 "S" CODE -- 303 CRES PER AMS5640 OR AMS5641.  
 "SS" CODE -- 303 CRES PER AMS5640 OR AMS5641.

**FINISH:** NO CODE -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE I, CLASS 3, PLUS SOLID FILM LUBRICANT PER AS5272 IF SELF-LOCKING TYPE.  
 "S" CODE -- PASSIVATED PER AMS2700 PLUS SOLID FILM LUBRICANT PER AS5272 IF SELF-LOCKING TYPE.  
 "SS" CODE -- SILVER PLATED PER AMS2410.

**SERVICE TEMP.:** NO CODE -- TO 450°F.  
 "S" CODE -- LOCKING: TO 450°F.  
 NON-LOCKING: TO 800°F.  
 "SS" CODE -- TO 800°F.

CONFORMS TO: NASM25027 AS8879	<h2>NAFCO USA, LLC</h2> <p>CARSON CITY, NV 89706</p>	PART NUMBER <h2>NA2092</h2> FEDERAL SUPPLY CODE: 32387
-------------------------------------	--	---