


CLINCHNUT, FLUSH MOUNTED, SELF-LOCKING

VARIATIONS: M -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EXAMPLE: NA2097CM-02-1.
 S -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL SILVER PLATING. EXAMPLE: NA2097CS-02-1.

APPLICATION: A PRESS-IN / FLARED SKIRT NUT FOR USE IN THIN ALUMINUM AND MAGNESIUM SHEETS, GRAPHITE COMPOSITE AND FIBER-REINFORCED PLASTIC SHEETS, PRINTED CIRCUIT BOARDS, ETC.

EXAMPLE CALLOUT:

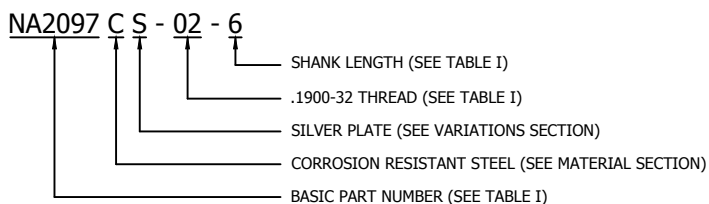

NOTES: (1) SEE PAGE 2.32 FOR INSTALLATION PROCEDURE AND RECOMMENDED TOOLING.
 (2) FOR OTHER FINISHES AND MATERIALS CONTACT NAFCO USA, LLC.

CONFORMS TO:
 NASM25027
 AS8879
 K7000/K7001

NAFCO USA, LLC
 CARSON CITY, NV 89706

PART NUMBER
NA2097, NA2097C
 FEDERAL SUPPLY CODE: 32387