

PRESSINSERT, NON-LOCKING AND END-GRIP SELF-LOCKING

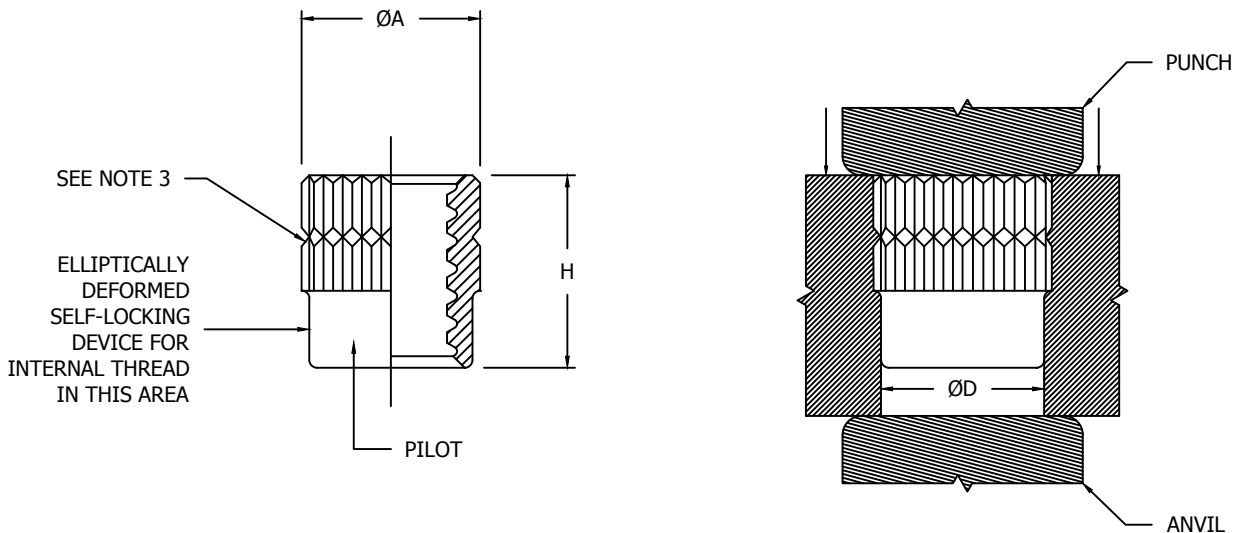


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	THREAD (AS8879)	A +.005 -.003	D HOLE SIZE +.003 -.000	H ±.010	APPROX. WEIGHT LBS./100
NA2123-00	.0600-80 UNJF-3B	.116	.106	.125	.045
NA2123-26	.0860-56 UNJC-3B	.116	.106	.125	.030
NA2123-40	.1120-40 UNJC-3B	.144	.136	.140	.050
NA2123-62	.1380-32 UNJC-3B	.176	.166	.160	.094
NA2123-82	.1640-32 UNJC-3B	.219	.196	.180	.151
NA2123-02	.1900-32 UNJF-3B	.250	.228	.180	.179

MATERIAL: 303 CRES PER AMS5640 OR AMS5641.

FINISH: NON-LOCKING -- PASSIVATED PER AMS2700.
LOCKING -- PASSIVATED PER AMS2700 PLUS SOLID FILM LUBRICANT PER AS5272.

SERVICE TEMP.: NON-LOCKING -- TO 800°F.
LOCKING -- TO 450°F.

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2123
FEDERAL SUPPLY CODE: 32387