




PRESSINSERT, NON-LOCKING AND END-GRIP SELF-LOCKING

APPLICATION: FOR USE IN LOW STRENGTH MATERIALS, SUCH AS ALUMINUM OR PLASTICS WHERE ADDITIONAL TENSILE STRENGTH, LOCKING OF SCREW INTO THREADED JOINT, AND INCREASED RESISTANCE TO THREAD WEAR IS DESIRED.

VARIATIONS: OTHER MATERIALS AND SIZES AVAILABLE UPON SPECIAL REQUEST.

EXAMPLE CALLOUT:

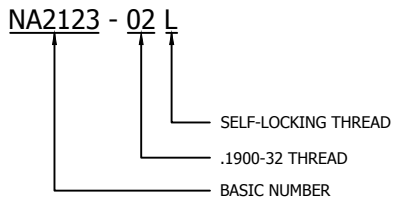

- NOTES:**
- 1.) FOR SELF-LOCKING THREAD FEATURE, ADD SUFFIX "L" AFTER DASH NUMBER.
 - 2.) THESE HOLE SIZES ARE SATISFACTORY FOR MOST APPLICATIONS. HOWEVER, "BEST" HOLE SIZE MAY VARY SLIGHTLY WITH MATERIAL AND EDGE DISTANCE.
 - 3.) LOCATION OF GROOVE IS APPROXIMATELY IN THE MIDDLE OF KNURL AND DEPTH TO MINOR DIAMETER OF KNURL.

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2123
FEDERAL SUPPLY CODE: 32387