



NUT, ANCHOR, RIGHT-ANGLE, FIXED, HORIZONTAL MOUNTING HOLES


SERVICE TEMP.: "D" CODE -- TO 250°F.
NO CODE -- TO 450°F.
"CS" CODE -- TO 800°F.
"C" CODE -- TO 900°F.

VARIATIONS: ADD "BC" AFTER DASH NO. FOR DIMPLED RIVET HOLES. EXAMPLE: NA2132C-02BC.
ADD "NR" AFTER DASH NO. FOR NO RIVET HOLES. EXAMPLE: NA2132C-02NR.
ADD "P" AFTER DASH NO. FOR PROJECTION WELDING NIBS (CRES PARTS ONLY). EXAMPLE: NA2132C-02P.
ADD "DF" AFTER DASH NO. FOR NAFCO MOLYBDENUM DISULFIDE DRY FILM LUBRICANT IN LIEU OF SILVER PLATE ON NUT. EXAMPLE: NA2132C-02DF.
NOTE THAT SERVICE TEMPERATURE WILL DECREASE TO 450°F WHEN A "DF" CODE IS COMBINED WITH A "C" OR "CS" CODE COMPONENT.
(REFER TO ENGINEERING DATA SECTION FOR DETAILS ON SUFFIX CODES).

APPLICATION: FOR ATTACHING ELECTRICAL JUNCTION BOX COVERS, ETC. AND OTHER APPLICATIONS REQUIRING THE MATING SCREW TO BE INSTALLED PARALLEL TO THE SURFACE UPON WHICH THE NUT IS MOUNTED.

EXAMPLE CALLOUT:

NA2132C-02

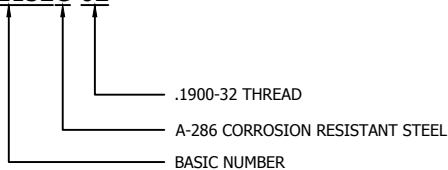

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2132
FEDERAL SUPPLY CODE: 32387