

# NUT, ANCHOR, RIGHT-ANGLE, FIXED, HORIZONTAL MOUNTING HOLES


SERVICE TEMP.: "D" CODE -- TO 250°F.  
NO CODE -- TO 450°F.  
"CS" CODE -- TO 800°F.  
"C" CODE -- TO 900°F.

VARIATIONS: ADD "BC" AFTER DASH NO. FOR DIMPLED RIVET HOLES. EXAMPLE: NA2132C-02BC.  
ADD "NR" AFTER DASH NO. FOR NO RIVET HOLES. EXAMPLE: NA2132C-02NR.  
ADD "P" AFTER DASH NO. FOR PROJECTION WELDING NIBS (CRES PARTS ONLY). EXAMPLE: NA2132C-02P.  
ADD "DF" AFTER DASH NO. FOR NAFCO MOLYBDENUM DISULFIDE DRY FILM LUBRICANT IN LIEU OF SILVER PLATE ON NUT. EXAMPLE: NA2132C-02DF.  
NOTE THAT SERVICE TEMPERATURE WILL DECREASE TO 450°F WHEN A "DF" CODE IS COMBINED WITH A "C" OR "CS" CODE COMPONENT.  
(REFER TO ENGINEERING DATA SECTION FOR DETAILS ON SUFFIX CODES).

APPLICATION: FOR ATTACHING ELECTRICAL JUNCTION BOX COVERS, ETC. AND OTHER APPLICATIONS REQUIRING THE MATING SCREW TO BE INSTALLED PARALLEL TO THE SURFACE UPON WHICH THE NUT IS MOUNTED.

EXAMPLE CALLOUT:

NA2132C-02

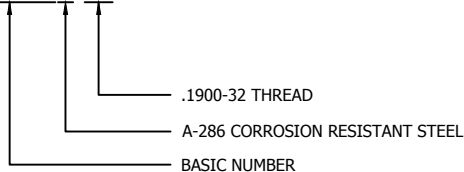

CONFORMS TO:  
NASM25027  
AS8879

**NAFCO USA, LLC**  
CARSON CITY, NV 89706

PART NUMBER  
**NA2132**  
FSC/CAGE CODE: 32387