

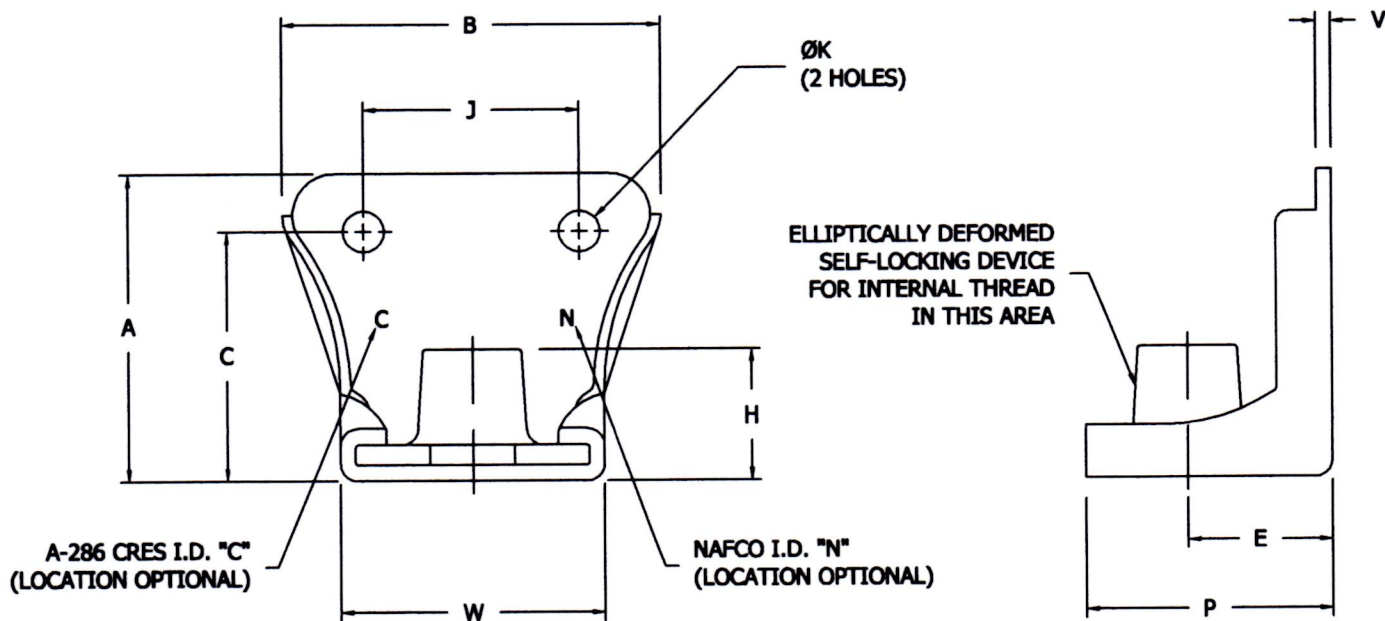


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER		NAFCO PART NUMBER		THREAD	A MAX	B MAX	C ±.005	E ±.010	H MAX	J ±.002	K +.005 -.000	P MAX	V REF	W MAX	APPROX WEIGHT LBS./100
STEEL 250°F	STEEL 450°F	CRES 800°F	CRES 900°F												
NA2132D-40	NA2132-40	NA2132CS-40	NA2132C-40	.1120-40 UNDC-3B	.635	.760	.469	.281	.160	.375	.098	.479	.025	.447	.30
NA2132D-62	NA2132-62	NA2132CS-62	NA2132C-62	.1380-32 UNDC-3B	.635	.760	.469	.281	.190	.375	.098	.479	.025	.447	.32
NA2132D-82	NA2132-82	NA2132CS-82	NA2132C-82	.1640-32 UNDC-3B	.635	.760	.469	.281	.260	.375	.098	.479	.025	.447	.33
NA2132D-02	NA2132-02	NA2132CS-02	NA2132C-02	.1900-32 UNDF-3B	.635	.760	.469	.281	.260	.375	.098	.479	.025	.447	.36