

NUT, CAPPED, CORNER, VARIABLE COUNTERBORE, FIXED, 160,000 PSI

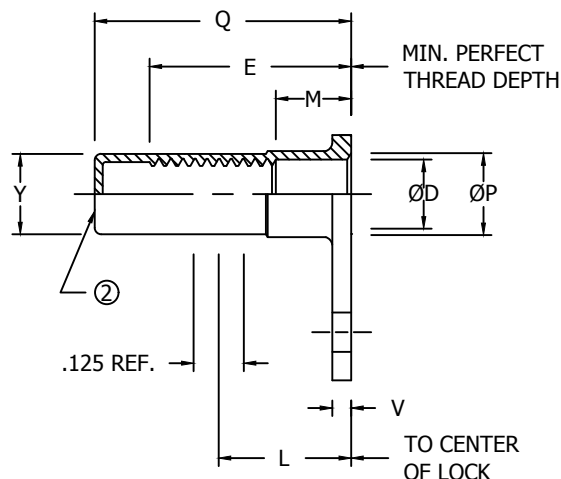
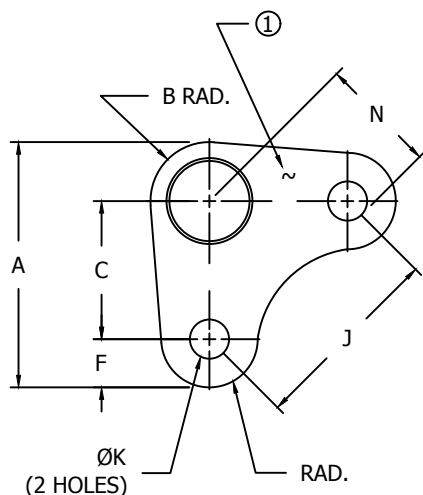


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	THREAD AS8879	A MAX	B REF.	C ±.005	ØD MIN	E MIN	F MIN	J ±.002	ØK +.005 -.000	L REF.	M +.010 -.000	N MAX	ØP MAX	Q +.020 -.010	V MAX	Y MAX	AXIAL TENSILE STRENGTH LBS. MIN.	APPROX. WT. LBS./100
NA2134-40-1	.1120-40 UNJC-3B	.611	.130	.344	.116	.312	.120	.486	.098	.170	.062	.235	.155	.432	.047	.150	960	.33
NA2134-40-2						.375												.35
NA2134-40-3						.437												.37
NA2134-40-4						.500												.39
NA2134-40-5						.562												.41
NA2134-62-1	.1380-32 UNJC-3B	.611	.130	.344	.142	.374	.120	.486	.098	.210	.062	.270	.206	.514	.047	.200	1,450	.47
NA2134-62-2						.437												.49
NA2134-62-3						.499												.52
NA2134-62-4						.562												.54
NA2134-62-5						.624												.57
NA2134-82-1	.1640-32 UNJC-3B	.637	.146	.344	.168	.390	.135	.486	.098	.210	.062	.270	.248	.560	.047	.235	2,240	.70
NA2134-82-2						.440												.75
NA2134-82-3						.510												.81
NA2134-82-4						.570												.86
NA2134-82-5						.640												.92
NA2134-02-1	.1900-32 UNJF-3B	.653	.162	.344	.194	.390	.140	.486	.098	.210	.062	.270	.274	.560	.047	.235	3,180	.60
NA2134-02-2						.440												.64
NA2134-02-3						.510												.68
NA2134-02-4						.570												.72
NA2134-02-5						.640												.76
NA2134-048-1	.2500-28 UNJF-3B	.852	.205	.500	.254	.430	.140	.707	.098	.220	.062	.280	.344	.615	.055	.310	5,820	1.07
NA2134-048-2						.490												1.15
NA2134-048-3						.560												1.23
NA2134-048-4						.620												1.31
NA2134-048-5						.680												1.39
NA2134-054-1	.3125-24 UNJF-3B	.902	.246	.500	.317	.500	.140	.707	.130	.250	.062	.307	.417	.750	.065	.425	9,260	2.11
NA2134-054-2						.562												2.21
NA2134-054-3						.625												2.31
NA2134-054-4						.687												2.41
NA2134-054-5						.750												2.51
NA2134-064-1	.3750-24 UNJF-3B	.956	.304	.500	.379	.500	.140	.707	.130	.250	.062	.330	.505	.775	.075	.515	14,000	2.99
NA2134-064-2						.562												3.14
NA2134-064-3						.625												3.29
NA2134-064-4						.687												3.44
NA2134-064-5						.750												3.59

CONFORMS TO:

NASM25027
AS8879

NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER

NA2134

FSC/CAGE CODE: 32387