



# NUT, ANCHOR, MINUATURE, SELF-LOCKING, TWO LUG, FIXED, CAPPED, 125,000 PSI

**MATERIAL:** NA1235 -- NUT - CARBON ATEEL, HEAT TREATED.  
CAP - CARBON STEEL.  
NA2135 C -- NUT - A-286 CORROSION RESISTANT STEEL.  
CAP - A-286 CORROSION RESISTANT STEEL OR 300 SERIES CORROSION RESISTANT STEEL.

**FINISH:** NA2135 -- CADMIUM PLATED PER QQ-P-416, TYPE II, CLASS 2. PLUS NAFCO CARBOWAX LUBRICANT.  
NA2135C -- NUT & CAP - SILVER PLATED PER AMS2410.


**SERVICE TEMP.:** NO CODE -- TO 450°F.  
"C" CODE -- TO 900°F.

**VARIATIONS:** ADD "H" AFTER DASH NO. FOR .062 DIAMETER INSPECTION HOLE IN TOP OF CAP. EXAMPLE: NA2135C-02KH.

**APPLICATION:** THE CAP ON THE NUT PREVENTS WIRE ABRASION, TRAPS METALLIC FLAKES AND PROTECTS BOLT THREADS AGAINST CONTAMINATION.

## EXAMPLE CALLOUT:

NA2135C-02K

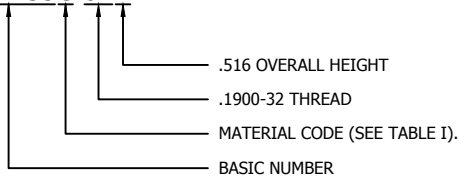

**NOTES:** 1.) THE CAP SQUARENESS SHALL NOT RESTRICT THE FULL ENTRY OF THE MATING BOLT.

CONFORMS TO:

NASM25027  
AS8879

# NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER

# NA2135

FEDERAL SUPPLY CODE: 32387