

NUT, ANCHOR, MINUATURE, SELF-LOCKING, TWO LUG, FIXED, CAPPED, 125,000 PSI

MATERIAL: NA1235 -- NUT - CARBON STEEL, HEAT TREATED.
CAP - CARBON STEEL.
NA2135 C -- NUT - A-286 CORROSION RESISTANT STEEL.
CAP - A-286 CORROSION RESISTANT STEEL OR 300 SERIES CORROSION RESISTANT STEEL.

FINISH: NA2135 -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE II, CLASS 2, PLUS NAFCO CARBOWAX LUBRICANT.
NA2135C -- NUT & CAP - SILVER PLATED PER AMS2410.


SERVICE TEMP.: NO CODE -- TO 450°F.
"C" CODE -- TO 900°F.

VARIATIONS: ADD "H" AFTER DASH NO. FOR .062 DIAMETER INSPECTION HOLE IN TOP OF CAP. EXAMPLE: NA2135C-02KH.

APPLICATION: THE CAP ON THE NUT PREVENTS WIRE ABRASION, TRAPS METALLIC FLAKES AND PROTECTS BOLT THREADS AGAINST CONTAMINATION.

EXAMPLE CALLOUT:

NA2135C-02K

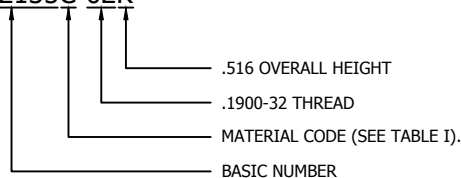

NOTES: 1.) THE CAP SQUARENESS SHALL NOT RESTRICT THE FULL ENTRY OF THE MATING BOLT.

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2135
FSC/CAGE CODE: 32387