


NUT, ANCHOR, MINUATURE,
SELF-LOCKING, CORNER,
FIXED, CAPPED, 125,000 PSI

- MATERIAL:** NA1236 -- NUT - CARBON STEEL, HEAT TREATED.
CAP - CARBON STEEL.
NA2136C -- NUT - A-286 CORROSION RESISTANT STEEL.
CAP - A-286 CORROSION RESISTANT STEEL OR 300 SERIES CORROSION RESISTANT STEEL.
- FINISH:** NA2136 -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE II, CLASS 2. PLUS NAFCO CARBOWAX LUBRICANT.
NA2136C -- NUT & CAP - SILVER PLATED PER AMS2410.
- SERVICE TEMP.:** NO CODE -- TO 450°F.
"C" CODE -- TO 900°F.
- VARIATIONS:** ADD "H" AFTER DASH NO. FOR .062 DIAMETER INSPECTION HOLE IN TOP OF CAP. EXAMPLE: NA2136C-02KH.
- APPLICATION:** THE CAP ON THE NUT PREVENTS WIRE ABRASION, TRAPS METALLIC FLAKES AND PROTECTS BOLT THREADS AGAINST CONTAMINATION.

EXAMPLE CALLOUT:

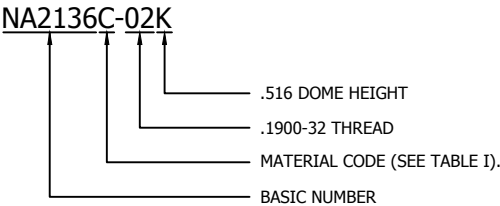

- NOTES:** 1.) THE CAP SQUARENESS SHALL NOT RESTRICT THE FULL ENTRY OF THE MATING BOLT.

CONFORMS TO: NASM25027 AS8879	NAFCO USA, LLC CARSON CITY, NV 89706	PART NUMBER NA2136 FSC/CAGE CODE: 32387
-------------------------------------	---	---