

# NUT, ANCHOR, MINIATURE, SELF-LOCKING, CORNER, FIXED, CAPPED, 125,000 PSI

**MATERIAL:** NA1236 -- NUT - ALLOY STEEL OR CARBON STEEL, HEAT TREATED.  
CAP - ALLOY STEEL OR CARBON STEEL.  
NA2136C -- NUT - A-286 CORROSION RESISTANT STEEL.  
CAP - A-286 CORROSION RESISTANT STEEL OR 300 SERIES CORROSION RESISTANT STEEL.

**FINISH:** NA2136 -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE II, CLASS 2 PLUS NAFCO CARBOWAX LUBRICANT.  
NA2136C -- NUT & CAP - SILVER PLATED PER AMS2410.


**SERVICE TEMP.:** NO CODE -- TO 450°F.  
"C" CODE -- TO 900°F.

**VARIATIONS:** ADD "H" AFTER DASH NO. FOR .062 DIAMETER INSPECTION HOLE IN TOP OF CAP. EXAMPLE: NA2136C-02KH.

**APPLICATION:** THE CAP ON THE NUT PREVENTS WIRE ABRASION, TRAPS METALLIC FLAKES AND PROTECTS BOLT THREADS AGAINST CONTAMINATION.

## EXAMPLE CALLOUT:

NA2136C-02K

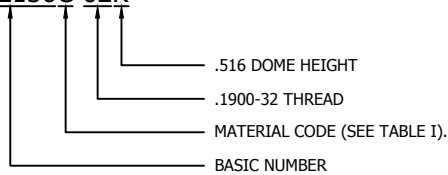

**NOTES:** 1.) THE CAP SQUARENESS SHALL NOT RESTRICT THE FULL ENTRY OF THE MATING BOLT.

CONFORMS TO:  
NASM25027  
AS8879

**NAFCO USA, LLC**  
CARSON CITY, NV 89706

PART NUMBER  
**NA2136**  
FSC/CAGE CODE: 32387