

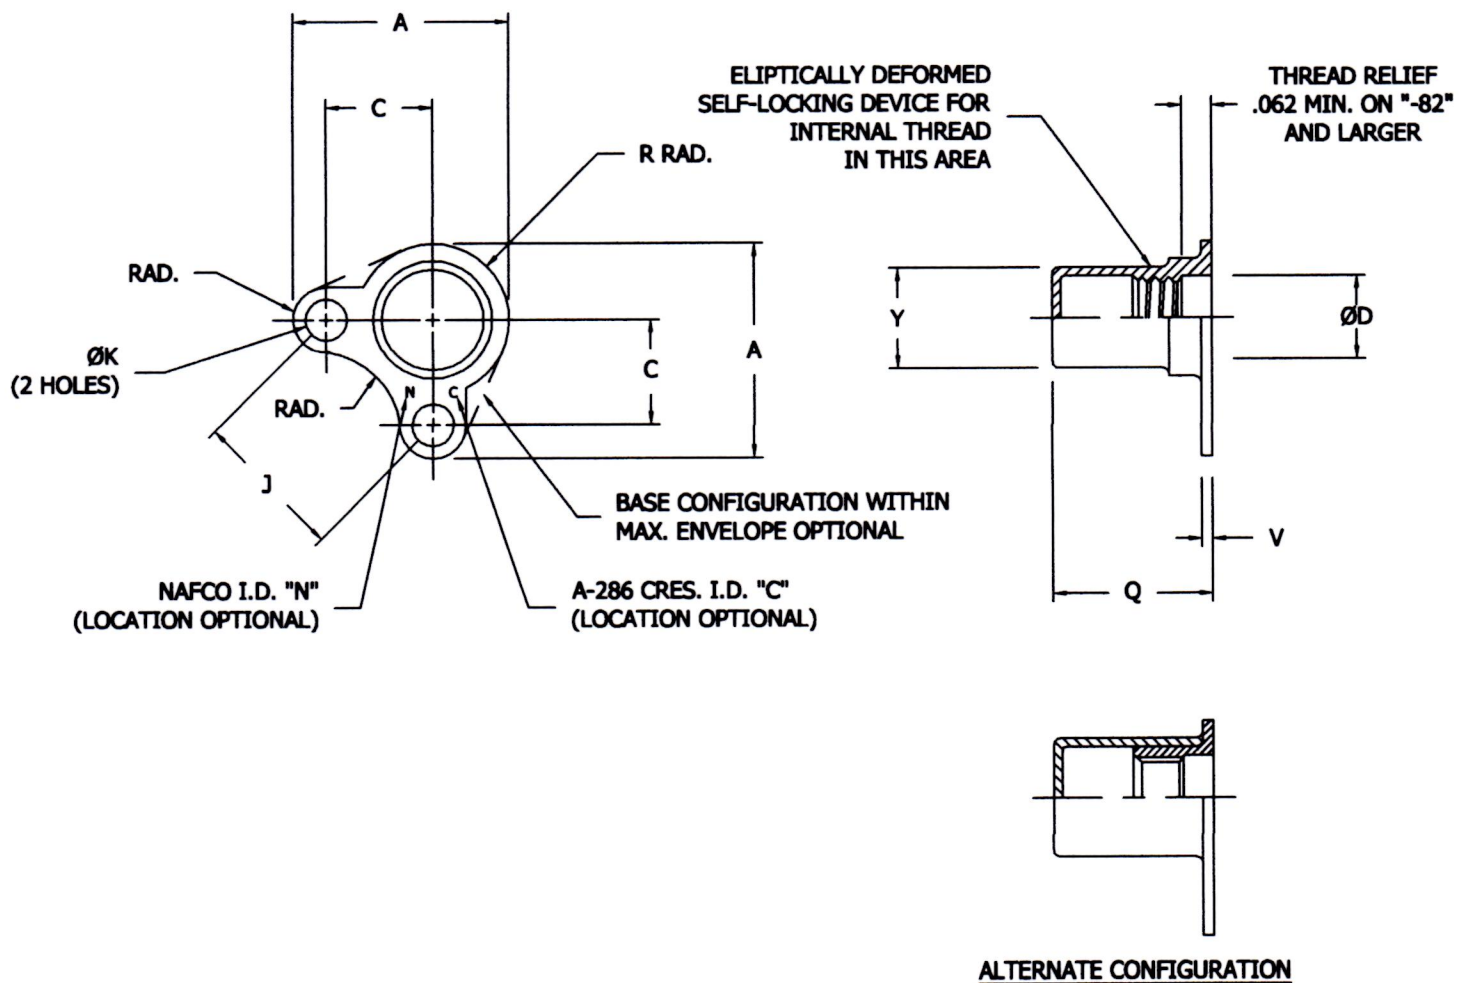


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER		THREAD	A	C	ØD	H	J	ØK	Q	R	V	Y	APPROX. WT.
STEEL	CRES	(MIL-S-8879)	MAX	±.005	MIN.	MAX.	±.002	+.005 -.000	+.020 -.010	MAX.	REF.	REF.	LBS./100
NA2136-40K	NA2136C-40K	.1120-40 UNJC-3B	.331	.148	—	.134	.210	.066	.293	.097	.025	.198	.12
NA2136-40K1	NA2136C-40K1								.179				.09
NA2136-62K	NA2136C-62K	.1380-32 UNJC-3B	.379	.172	—	.156	.243	.066	.516	.121	.032	.228	.23
NA2136-62K1	NA2136C-62K1								.375				.19
NA2136-82K	NA2136C-82K	.1640-32 UNJC-3B	.479	.234	.168	.228	.331	.098	.516	.148	.032	.252	.34
NA2136-82K1	NA2136C-82K1								.375				.28
NA2136-02K	NA2136C-02K	.1900-32 UNDF-3B	.526	.250	.194	.228	.354	.098	.516	.164	.032	.280	.36
NA2136-02K1	NA2136C-02K1								.375				.32
NA2136-048K	NA2136C-048K	.2500-28 UNDF-3B	.603	.281	.254	.254	.398	.098	.547	.207	.040	.347	.55
NA2136-048K1	NA2136C-048K1								.438				.49