



NUT, ANCHOR, MINIATURE, TWO LUG, FLOATING, CAPPED, 125,000 PSI

MATERIAL: NA2140 -- NUT & RETAINER -- CARBON OR ALLOY STEEL, HEAT TREATED.
 NA2140C -- NUT & RETAINER -- A-286 CORROSION RESISTANT STEEL.
 NA2140C -- CAP -- A-286 CORROSION RESISTANT STEEL OR 321 CORROSION RESISTANT STEEL.

FINISH: NA2140 -- CADMIUM PLATED PER AMS-QQ-P-416, TYPE II, CLASS 2 PLUS NAFCO CARBOWAX LUBRICANT.
 NA2140C -- NUT & CAP -- SILVER PLATED PER AMS2410.
 RETAINER -- PASSIVATED PER AMS2700.


SERVICE TEMP.: NO CODE -- TO 450°F.
 "C" CODE -- TO 900°F.

VARIATIONS: ADD "H" AFTER DASH NO. FOR Ø.062 INSPECTION HOLE IN TOP OF CAP. EXAMPLE: NA2140C-02KH.

APPLICATION: THE CAP ON THE NUT PREVENTS WIRE ABRASION, TRAPS METALLIC FLAKES AND PROTECTS BOLT THREADS AGAINST CONTAMINATION.

EXAMPLE CALLOUT:

NA2140C-02K

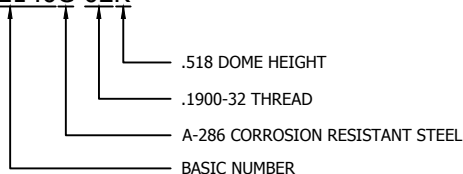

NOTES:
 1.) FLOATIBILITY -- .020 RADIALLY FROM CENTER, MINIMUM.
 2.) THE CAP SQUARENESS SHALL NOT RESTRICT THE FULL ENTRY OF THE MATING BOLT.

CONFORMS TO:
 NASM25027
 AS8879

NAFCO USA, LLC
 CARSON CITY, NV 89706

PART NUMBER
NA2140
 FSC/CAGE CODE: 32387