



NUT, ANCHOR, ONE LUG, FLOATING, C'BORED, 160 KSI, CRES, HIGH REUSEABILITY

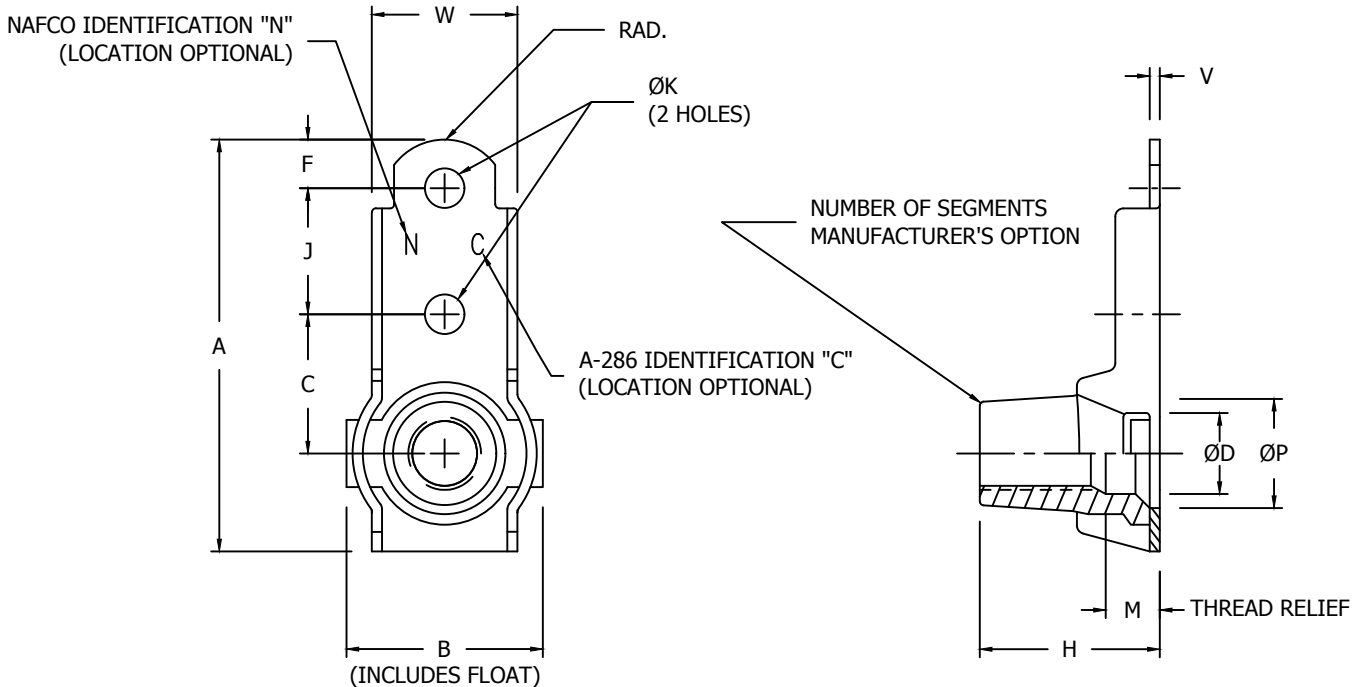


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	THREAD (MIL-S-8879)	A MAX	B MAX	C ±.005	ØD MIN	F MIN	H MAX	J ±.002	K +.005 -.000	M +.015 -.000	ØP MAX	V MAX	W ±.015	AXIAL TENSILE STRENGTH LBS. MIN	APPROX. WEIGHT LBS./100
NA2177C-02-1	.1900-32 UNJF-3B	1.051	.530	.344	.194	.100	.382	.312	.098	.062	.270	.032	.360	3470	.59
NA2177C-02-2							.445			.125					.65
NA2177C-02-3							.507			.188					.70
NA2177C-02-4							.570			.250					.75
NA2177C-02-5							.632			.312					.80
NA2177C-048-1	.2500-28 UNJF-3B	1.306	.629	.500	.254	.100	.454	.312	.098	.062	.330	.032	.360	6200	1.18
NA2177C-048-2							.517			.125					1.27
NA2177C-048-3							.579			.188					1.34
NA2177C-048-4							.642			.250					1.40
NA2177C-048-5							.704			.312					1.47


MATERIAL: NUT -- A-286 CRES PER AMS5732 OR AMS5737.
RETAINER -- A-286 CRES PER AMS5525.

FINISH: NUT -- MOLYBDENUM DISULFIDE DRY FILM LUBRICANT PER AS5272.
RETAINER -- PASSIVATED PER AMS2700.

PROCUREMENT SPECIFICATION:
NASM25027 EXCEPT FOR PERFORMANCE REQUIREMENTS.

EXAMPLE CALLOUT:

NA2177C-02-5



CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER

NA2177C

FEDERAL SUPPLY CODE: 32387