


PRESSINSERT, SELF-LOCKING

CODE: ADD SUFFIX "B" AFTER BASIC PART NUMBER FOR HALF-HARD BRASS.
 ADD SUFFIX "C" AFTER BASIC PART NUMBER FOR 303 CRES.
 ADD SUFFIX "D" AFTER BASIC PART NUMBER FOR ALUMINUM ALLOY.
 ADD SUFFIX "S" AFTER BASIC PART NUMBER FOR CARBON STEEL.

EXAMPLE CALLOUT:

NA41 S 375 - 02 SP

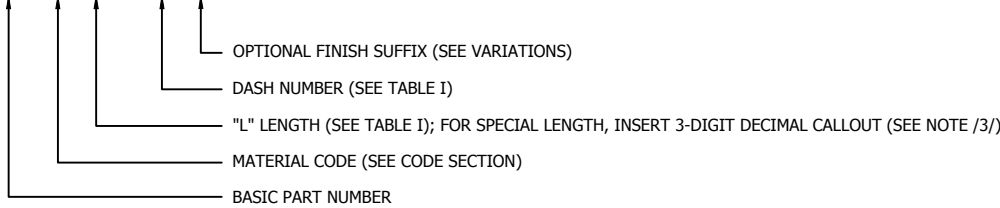

NOTES:
(1) OTHER SIZES AVAILABLE UPON REQUEST. THREAD SIZES RANGE FROM #0-80 THROUGH 3/8-16.
/2/ INSERT CLASS 2 "GO" GAUGE IN THREADS BEFORE MEASURING.
/3/ LENGTHS SHOWN ARE STANDARD. SPECIAL LENGTHS AVAILABLE ON ORDER.
/4/ THESE HOLE SIZES ARE BASED ON AVERAGE MATERIALS AND TORQUE REQUIREMENTS.
HOLE SIZES MAY VARY WITH THE MATERIAL USED AND THE SCREW DIMENSIONS MAY VARY WITH DIFFERENT STANDARDS. THESE VARIABLES MAY AFFECT YOUR NEEDS.

CONFORMS TO:

AS8879

NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER
NA41
FSC / CAGE CODE: 32387