



NUT-DOME, SEALED, MINI, SELF-LOCKING, STRESS-RELIEVING, FLOATING, RIVETLESS, 900MPa

FINISH:
 STEEL NUT, SHELL AND WASHER -- CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
 CRES NUT, SHELL AND WASHER -- CLEAN AND PASSIVATE PER MIL-DTL-5002.
 NUT (WHEN CODED "C") -- SILVER PLATE PER AMS2410.
 ALUMINUM ALLOY WASHER -- ANODIZE OR CHEMICAL FILM PER NASM25027, EXCEPT ANODIZE SHALL BE LIMITED TO TYPE I OR TYPE II.
 TITANIUM AND 17-4 PH RETAINER -- PASSIVATE PER AMS2700.

LUBRICATION: APPROVED DRY FILM LUBRICANT ON NUTS WHEN CODED AS SHOWN IN MATERIAL CODE SECTION.


CODE: MATERIAL CODE (APPENDED TO BASIC NUMBER)
 "A" -- STEEL NUT AND SHELL WITH ALUMINUM ALLOY OR STEEL WASHER, FUEL RESISTANT MIL-PRF-6855 SEAL (120°C), DRY FILM LUBRICATED.
 "X" -- SAME AS "A" WITHOUT DRY FILM LUBRICANT.
 "S" -- STEEL NUT, SHELL AND WASHER, FUEL RESISTANT MIL-DTL-25988 SEAL (175°C), DRY FILM LUBRICATED.
 "Y" -- SAME AS "S" WITHOUT DRY FILM LUBRICANT.
 "C" -- CRES NUT (SILVER PLATED), SHELL AND WASHER, NON-FUEL RESISTANT AMS3304 SEAL (230°C).
 "R" -- CRES NUT, SHELL AND WASHER, FUEL RESISTANT MIL-PRF-6855 SEAL (120°C), DRY FILM LUBRICATED.
 "F" -- CRES NUT, SHELL AND WASHER, FUEL RESISTANT MIL-DTL-25988 SEAL (175°C), DRY FILM LUBRICATED.

RETAINER:

FOR 17-4 PH MATERIAL, REPLACE "T" CODE IN PART NUMBER WITH "S".

EXAMPLE CALLOUT:

NA2455 R - 05M OS - T - II - ()

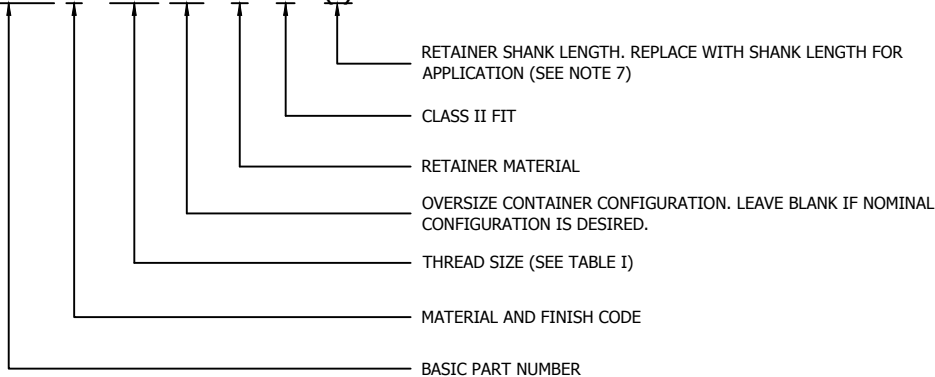

CONFORMS TO:
 NASM25027
 AS8879

NAFCO USA, LLC
 CARSON CITY, NV 89706

PART NUMBER
NA2455
 FEDERAL SUPPLY CODE: 32387