


CLINCHNUT SELF-LOCKING

VARIATIONS: "M" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168SM-02-1
 "S" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL SILVER PLATE. EX. - NA2168CS-82-2
 "DF" -- ADD AFTER LAST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168-82-2DF

APPLICATION: A PRESS-IN NUT FOR USE IN THIN ALUMINUM AND MAGNESIUM SHEETS, GRAPHITE COMPOSITE AND FIBER-REINFORCED PLASTIC SHEETS, PRINTED CIRCUIT BOARDS, ETC.

EXAMPLE CALLOUT:

NA2168SM-02-1

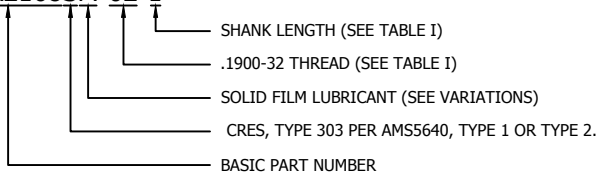

NOTES:

1. UNDER NO CIRCUMSTANCES WILL SILVER PLATING AND SOLID FILM LUBRICANT BOTH BE APPLIED TO A286 CORROSION RESISTANT STEEL.
2. "M" FINISH CODE IS EQUIVALENT TO AND SUPERSEDES "DF" FINISH CODE.
3. FOR OTHER FINISHES AND MATERIALS CONTACT NAFCO USA, LLC.
4. PUSH-OUT AND TORQUE-OUT VALUES SHALL BE AS SPECIFIED IN TABLE II WHEN PROPERLY INSTALLED IN LOW CARBON STEEL SHEET.

CONFORMS TO:
 NASM25027
 AS8879

NAFCO USA, LLC
 CARSON CITY, NV 89706

PART NUMBER
NA2168
 FEDERAL SUPPLY CODE: 32387