




CLINCHNUT SELF-LOCKING

VARIATIONS: "M" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168SM-02-1
 "S" -- ADD BEFORE FIRST DASH NO. FOR OPTIONAL SILVER PLATE. EX. - NA2168CS-82-2
 "DF" -- ADD AFTER LAST DASH NO. FOR OPTIONAL DRY FILM LUBRICANT. EX. - NA2168-82-2DF

APPLICATION: A PRESS-IN NUT FOR USE IN THIN ALUMINUM AND MAGNESIUM SHEETS, GRAPHITE COMPOSITE AND FIBER-REINFORCED PLASTIC SHEETS, PRINTED CIRCUIT BOARDS, ETC.

EXAMPLE CALLOUT:

NA2168SM-02-1

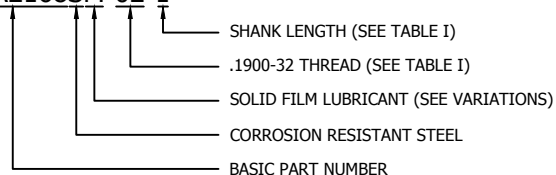

- NOTES:
- 1.) SEE PAGE 2.22 FOR INSTALLATION PROCEDURE AND RECOMMENDED TOOLING.
 - 2.) UNDER NO CIRCUMSTANCES WILL SILVER PLATING AND SOLID FILM LUBRICANT BOTH BE APPLIED TO A286 CORROSION RESISTANT STEEL.
 - 3.) "M" FINISH CODE IS EQUIVALENT TO AND SUPERSEDES "DF" FINISH CODE.
 - 4.) FOR OTHER FINISHES AND MATERIALS CONTACT NAFCO USA, LLC.

CONFORMS TO:
 NASM25027
 AS8879

NAFCO USA, LLC
 CARSON CITY, NV 89706

PART NUMBER
NA2168
 FEDERAL SUPPLY CODE: 32387