

# NUTPLATE, RIVETLESS, TI AND STAINLESS STEEL RETAINER, SEALED HEAD, CLASS I, FLOATING

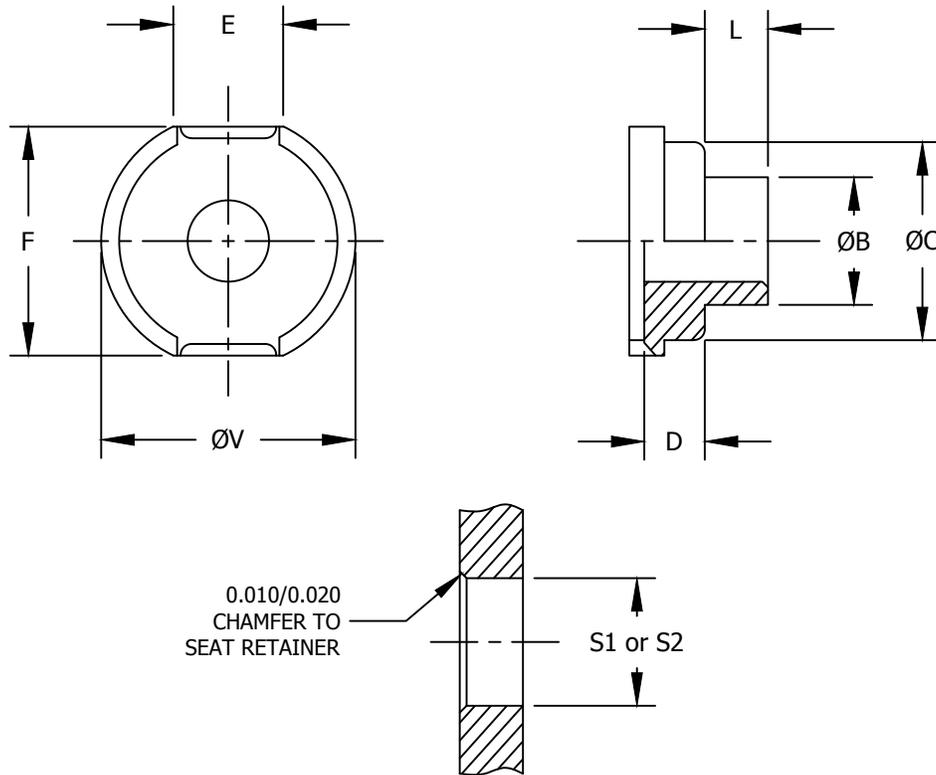


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER	FASTENER DIAMETER	ØB	ØC MAX	D	E NOM	F	R RAD MIN	ØV MAX	STARTING HOLE		L MINIMUM	
									S1	S2	S1	S2
NA2482-3-(**)S	.188	.2965	.455	.146	.285	.583	.030	.680	.2984	.2989	.080	.130
		.2953		.132		.580			.2964	.2959		
NA2482-3-(**)T	.188	.2965	.455	.146	.285	.583	.030	.680	.2984	.2989	.130	.220
		.2953		.132		.580			.2964	.2959		
NA2482-4-(**)S	.250	.3432	.575	.168	.366	.653	.050	.775	.3453	.3458	.080	.130
		.3418		.150		.650			.3433	.3428		
NA2482-4-(**)T	.250	.3432	.575	.168	.366	.653	.050	.775	.3453	.3458	.090	.140
		.3418		.150		.650			.3433	.3428		
NA2482-5-(**)S	.313	.4052	.735	.193	.435	.813	.050	.935	.4083	---	.120	---
		.4038		.175		.810			.4053	---		
NA2482-5-(**)T	.313	.4052	.735	.193	.435	.813	.050	.935	.4083	---	.150	---
		.4038		.175		.810			.4053	---		
NA2482-6-(**)S	.375	.4677	.800	.223	.456	.948	.050	1.053	.4708	---	.150	---
		.4663		.205		.945			.4678	---		
NA2482-6-(**)T	.375	.4677	.800	.223	.456	.948	.050	1.053	.4708	---	.140	---
		.4663		.205		.945			.4678	---		
NA2482-7-(**)S	.438	.5302	.805	.245	.502	.981	.050	1.095	.5333	---	.170	---
		.5288		.227		.978			.5303	---		
NA2482-7-(**)T	.438	.5302	.805	.245	.502	.981	.050	1.095	.5333	---	.240	---
		.5288		.227		.978			.5303	---		
NA2482-8-(**)S	.500	.5927	.920	.247	.536	1.067	.050	1.180	.5958	---	.170	---
		.5913		.229		1.064			.5928	---		
NA2482-8-(**)T	.500	.5927	.920	.247	.536	1.067	.050	1.180	.5958	---	.240	---
		.5913		.229		1.064			.5928	---		

CONFORMS TO:  
NASM25027  
AS8879

**NAFCO USA, LLC**  
CARSON CITY, NV 89706

PART NUMBER  
**NA2482**

FSCM / CAGE CODE: 32387