



NUT, ANCHOR, SELF-LOCKING, TWO LUG, FLOATING, CAPPED, 125,000 PSI

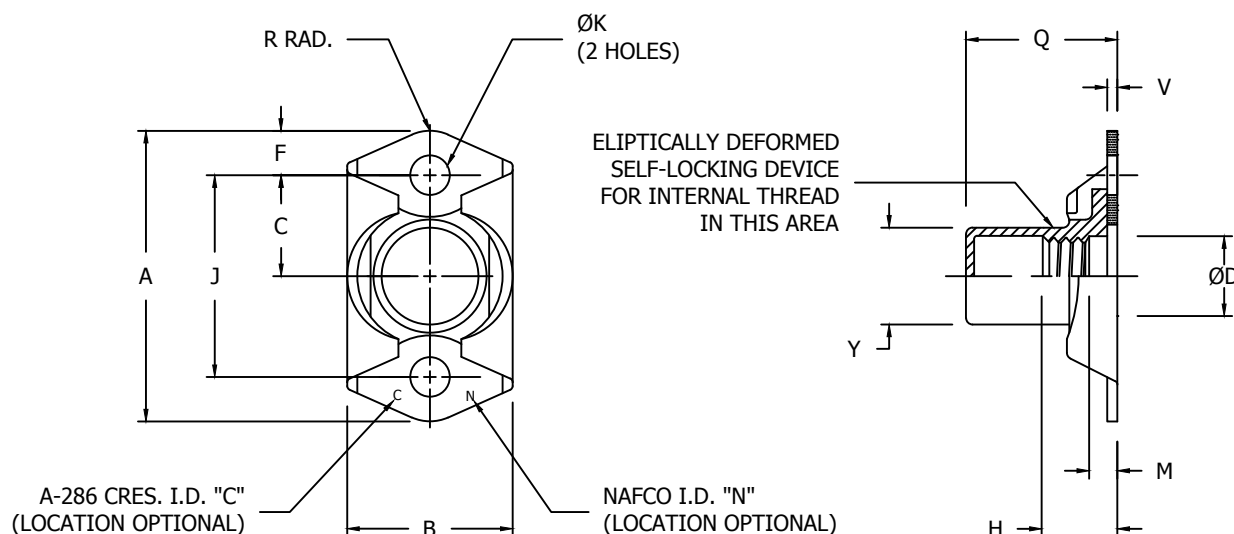

ALTERNATE CONFIGURATION

TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER		THREAD AS8879	A MAX	B MAX	C ±.005	ØD MIN	H REF	J ±.002	K +.005 -.000	M MIN	Q +.020 -.010	R MIN	V	W	Y MAX	APPROX WEIGHT LB/100
STEEL 450°F	CRES 900°F															
NA2143-62K	NA2143C-62K	.1380-32 UNJC-3B	.910	.416	.344	.142	.190	.688	.098	---	.518	.100	.025	.200	.238	.48
NA2143-62K1	NA2143C-62K1										.377					.45
NA2143-82K	NA2143C-82K	.1640-32 UNJC-3B	.910	.416	.344	.168	.220	.688	.098	.063	.518	.100	.025	.200	.262	.55
NA2143-82K1	NA2143C-82K1										.377					.50
NA2143-02K	NA2143C-02K	.1900-32 UNJF-3B	.910	.416	.344	.194	.220	.688	.098	.063	.518	.100	.025	.200	.290	.55
NA2143-02K1	NA2143C-02K1										.377					.51
NA2143-048K	NA2143C-048K	.2500-28 UNJF-3B	1.290	.516	.500	.254	.281	1.000	.098	.071	.549	.100	.031	.200	.357	1.16
NA2143-048K1	NA2143C-048K1										.440					1.10
NA2143-054K	NA2143C-054K	.3120-24 UNJF-3B	1.290	.609	.500	.317	.328	1.000	.130	.118	.611	.125	.035	.230	.421	1.47
NA2143-054K1	NA2143C-054K1										.502					1.37
NA2143-064K	NA2143C-064K	.3750-24 UNJF-3B	1.290	.680	.500	.379	.344	1.000	.130	.118	.721	.125	.035	.230	.482	2.00
NA2143-064K1	NA2143C-064K1										.502					1.88

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2143
FEDERAL SUPPLY CODE: 32387