




# MOLDSERT, NON-LOCKING AND MID-GRIP SELF-LOCKING

**APPLICATION:** FOR MOLDING IN PLASTICS AND ALUMINUM. PROVIDES ADDITIONAL TENSILE STRENGTH, INCREASED RESISTANCE TO THREAD WEAR, AND LOCKING OF SCREW INTO THREADED JOINT.

**VARIATIONS:** OTHER MATERIALS AND SIZES AVAILABLE UPON SPECIAL REQUEST.

**CODES:** "L" CODE -- SUFFIXED TO DASH NUMBER INDICATED SELF-LOCKING FEATURE (SEE NOTE 1).

**EXAMPLE CALLOUT:**

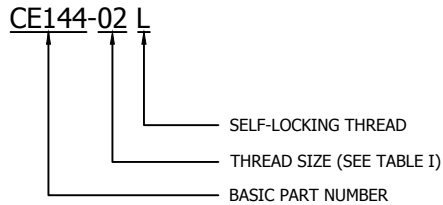

- NOTES:**
- 1.) FOR SELF-LOCKING THREAD FEATURE, ADD SUFFIX "L" AFTER DASH NUMBER.
  - 2.) "K" PILOT MAY BE MOLDED SO THAT IT PROTRUDES ABOVE SURFACE OF PARENT MATERIAL, THUS ACTING AS A "LOCATING PIN" FOR MATING PARTS.

CONFORMS TO:  
NASM25027  
AS8879

**NAFCO USA, LLC**  
CARSON CITY, NV 89706

PART NUMBER  
**CE144**  
FSC / CAGE CODE: 32387