




# NUT, PLATE, SELF-LOCKING, LOW HEIGHT, FIXED, TWO LUG, CRES, REDUCED RIVET SPACING

CODE: "C" -- FOLLOWING BASIC NUMBER INDICATES A286 CRES MATERIAL.  
 "M" -- FOLLOWING MATERIAL CODE SPECIFIES PASSIVATION AND SOLID FILM LUBRICANT.  
 "S" -- FOLLOWING MATERIAL CODE SPECIFIES SILVER PLATE.  
 "BC" -- SUFFIXED TO DASH NUMBER SPECIFIES DIMPLED RIVET HOLES.

EXAMPLE CALLOUT:

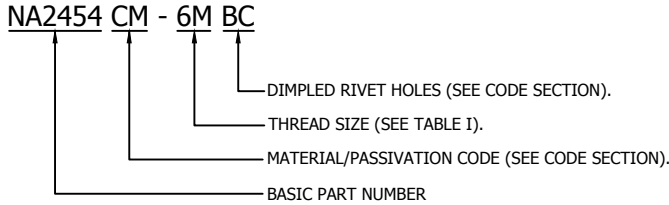

- NOTES:
- /1/ MINIMUM "E" LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION.
  - /2/ THREADS SHALL BE MJ FORM IN ACCORDANCE WITH FED-STD-H28/21. FOR ACCEPTABILITY SEE PROCUREMENT SPECIFICATION.
  - (3) DIMENSIONS IN MILLIMETERS AND APPLY AFTER FINISH AND PRIOR TO THE APPLICATION OF LUBRICATION UNLESS OTHERWISE SPECIFIED.
  - /4/ THESE GRAPHIC DEPICTIONS ARE ENVELOPES. PARTS MAY VARY IN FORM AND SHAPE, BUT SHALL MEET DIMENSIONAL REQUIREMENTS.
  - (5) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
  - (6) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
  - (7) MAGNETIC PERMEABILITY SHALL BE LESS THAN 2,0 (AIR=1,0) FOR A FIELD STRENGTH H=16 kA/m USING A MAGNETIC PERMEABILITY INDICATOR PER ASTM A342/A34M, TEST METHOD 3.
  - (8) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
  - (9) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.

PROCUREMENT SPECIFICATION:  
 NA0044, CLASS I.

CONFORMS TO:

NA0044

# NAFCO USA, LLC

CARSON CITY, NV 89706

PART NUMBER

## NA2454

FSCM / CAGE CODE: 32387