



MOLDSERT, PLUGGED NON-LOCKING AND MID-GRIP SELF-LOCKING


APPLICATION: FOR MOLDING IN PLASTICS AND ALUMINUM. PROVIDES ADDITIONAL TENSILE STRENGTH, INCREASED RESISTANCE TO THREAD WEAR, AND LOCKING OF SCREW INTO THREADED JOINT.

THE MECHANICALLY RETAINED PLUG ALLOWS FOR MUCH LIGHTER AND SHORTER BLIND MOLDED-IN INSERTS THAN OTHER DESIGNS THAT ARE MANUFACTURED WITH A BLIND INTERNALLY THREADED HOLE.

VARIATIONS: OTHER MATERIALS AND SIZES AVAILABLE UPON SPECIAL REQUEST.

EXAMPLE CALLOUT:

CE150S-02 L

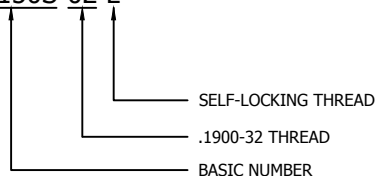

NOTES:

- 1.) FOR SELF-LOCKING THREAD FEATURE, ADD SUFFIX "L" AFTER DASH NUMBER.
- 2.) "K" PILOT MAY BE MOLDED SO THAT IT PROTRUDES ABOVE SURFACE OF PARENT MATERIAL, THUS ACTING AS A "LOCATING PIN" FOR MATING PARTS.
- 3.) .0860-56 THREAD SIZE WILL NOT HAVE PILOT "K" AFTER CURRENT INVENTORY IS DEPLETED.

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
CE150S
FSC / CAGE CODE: 32387