

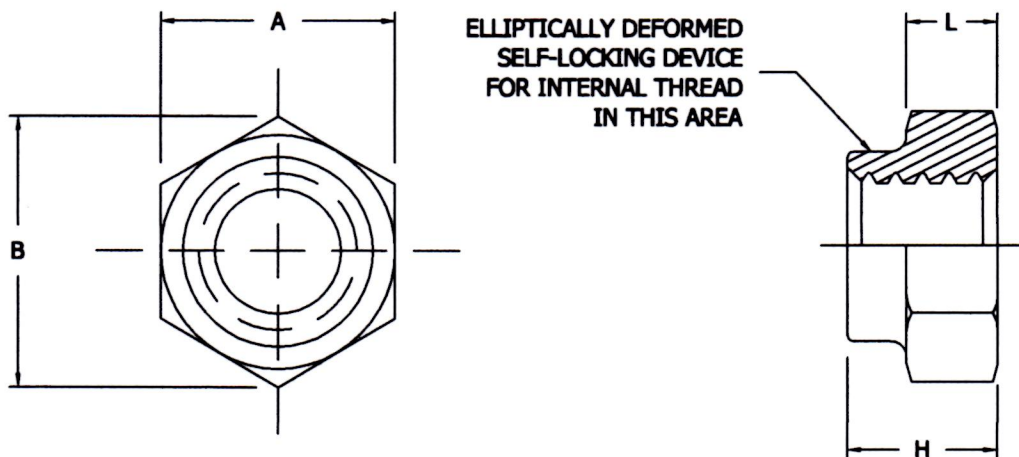


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER			THREAD (AS8879)	A ---	B REF	H ±.005	L REF	APPROX. WEIGHT LBS./100
STEEL 450°F	CRES. 650°F	CRES. 650°F						
NA2013-00	NA2013S-00	NA2013SS-00	.0600-80 UNDF-3B	.104 - .110	.116	.065	.040	.011
NA2013-24	NA2013S-24	NA2013SS-24	.0860-64 UNDF-3B	.150 - .158	.169	.095	.048	.028
NA2013-26	NA2013S-26	NA2013SS-26	.0860-56 UNJC-3B					
NA2013-36	NA2013S-36	NA2013SS-36	.0990-56 UNDF-3B	.181 - .190	.205	.110	.063	.045
NA2013-38	NA2013S-38	NA2013SS-38	.0990-48 UNJC-3B					
NA2013-48	NA2013S-48	NA2013SS-48	.1120-48 UNDF-3B	.181 - .190	.205	.110	.063	.045
NA2013-40	NA2013S-40	NA2013SS-40	.1120-40 UNJC-3B					
NA2013-54	NA2013S-54	NA2013SS-54	.1250-44 UNDF-3B	.181 - .190	.205	.120	.076	.045
NA2013-50	NA2013S-50	NA2013SS-50	.1250-40 UNJC-3B					
NA2013-60	NA2013S-60	NA2013SS-60	.1380-40 UNDF-3B	.212 - .220	.233	.140	.085	.088
NA2013-62	NA2013S-62	NA2013SS-62	.1380-32 UNJC-3B					