



NUT, ANCHOR, MINIATURE, SELF-LOCKING, CORNER, FIXED, CAPPED, 125,000 PSI

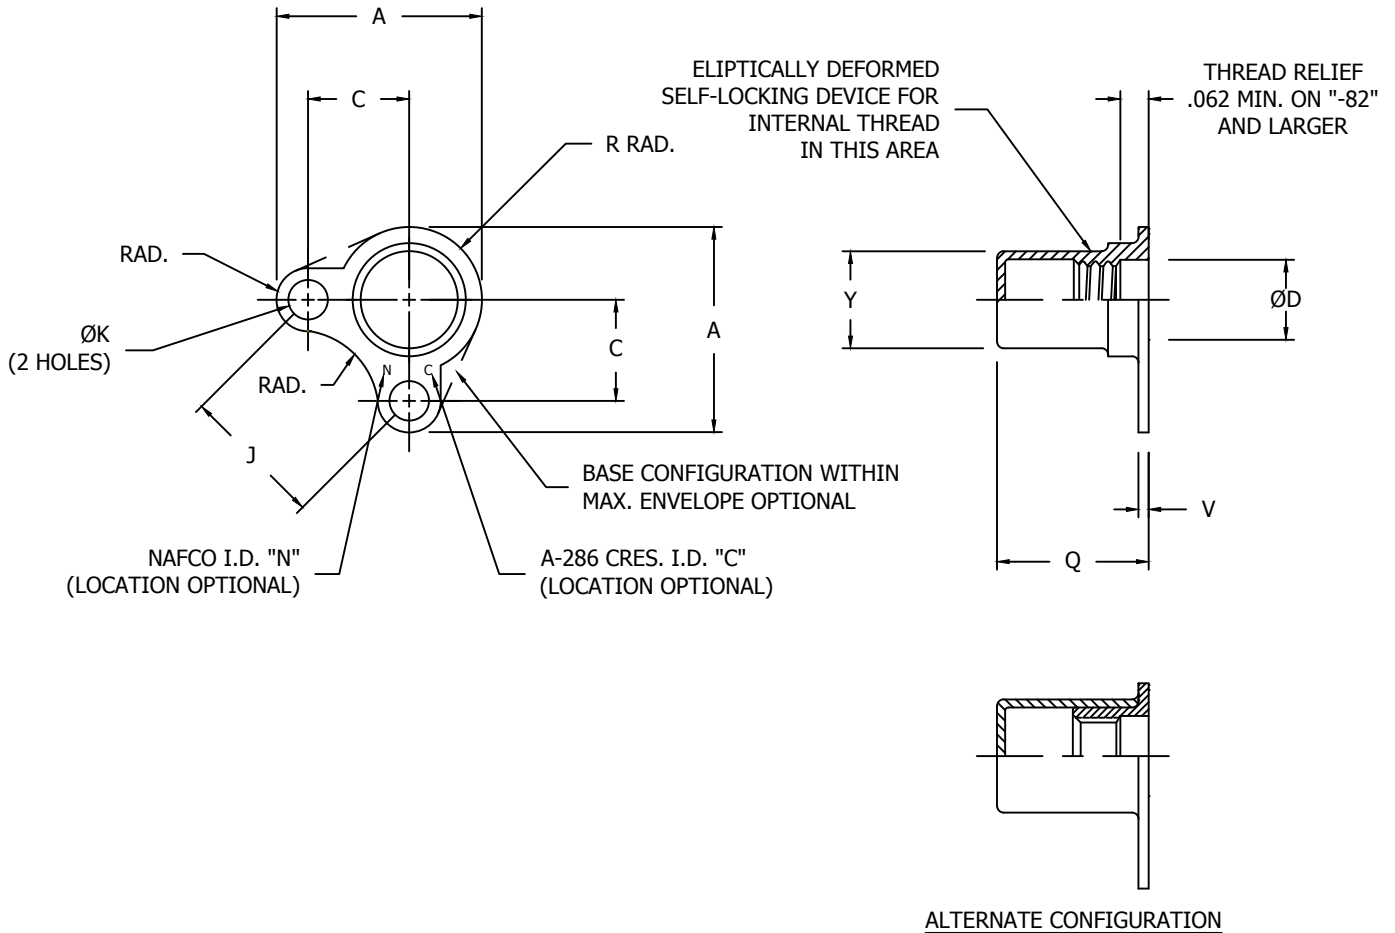


TABLE I - DIMENSIONS AND DASH NUMBERS

NAFCO PART NUMBER		THREAD (MIL-S-8879)	A MAX	C ±.005	ØD MIN.	H MAX.	J ±.002	ØK +.005 -.000	Q +.020 -.010	R MAX.	V REF.	Y REF.	APPROX. WT. LBS./100
STEEL 450°F	CRES 900°F												
NA2136-40K	NA2136C-40K	.1120-40 UNJC-3B	.331	.148	---	.134	.210	.066	.293	.097	.025	.198	.12
NA2136-40K1	NA2136C-40K1								.179				.09
NA2136-62K	NA2136C-62K	.1380-32 UNJC-3B	.379	.172	---	.156	.243	.066	.516	.121	.032	.228	.23
NA2136-62K1	NA2136C-62K1								.375				.19
NA2136-82K	NA2136C-82K	.1640-32 UNJC-3B	.479	.234	.168	.228	.331	.098	.516	.148	.032	.252	.34
NA2136-82K1	NA2136C-82K1								.375				.28
NA2136-02K	NA2136C-02K	.1900-32 UNJF-3B	.526	.250	.194	.228	.354	.098	.516	.164	.032	.280	.36
NA2136-02K1	NA2136C-02K1								.375				.32
NA2136-048K	NA2136C-048K	.2500-28 UNJF-3B	.603	.281	.254	.254	.398	.098	.547	.207	.040	.347	.55
NA2136-048K1	NA2136C-048K1								.438				.49

CONFORMS TO:
NASM25027
AS8879

NAFCO USA, LLC
CARSON CITY, NV 89706

PART NUMBER
NA2136
FEDERAL SUPPLY CODE: 32387